


Model:STB6517Z

Features:

Beautiful appearance, circuit board welding, can replace the same at home and abroad Class products, three-phase synchronization signal and power supply voltage as a whole, Z-type For the lead directly lead to the circuit board.

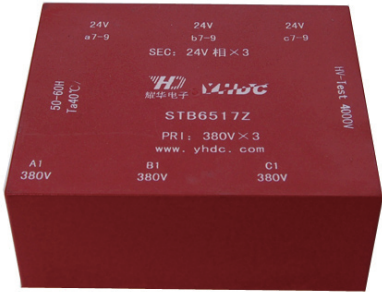


Technical indicators:

- Installation: PCB
- Flammability: UL94-V0
- Insulation class: B
- Working temperature: -30℃~+40℃
- Frequency range: 50Hz~60Hz
- Dielectric strength: 4KV 50Hz 1min



Electrical parameters:

Primary operating voltage	3-1140	V
Primary voltage range	±10	%
Voltage regulation	≤25	%
rated power	30	VA
Temperature rise	30	℃
Load loss	0.8	W
weight	655	g

Wiring schematic diagram:

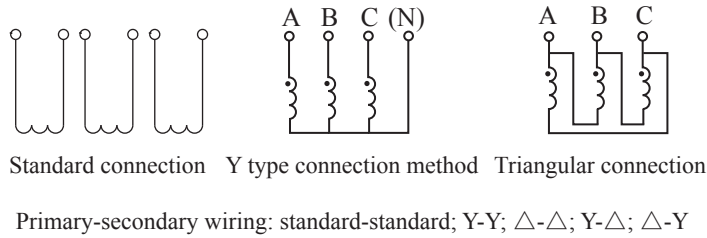

Dimension drawing (in mm):

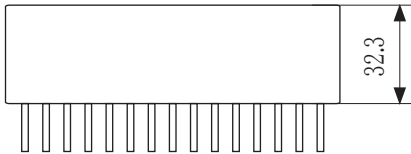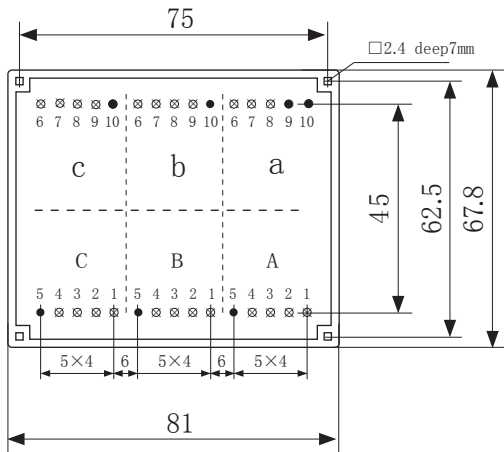

Bottom View

Side view